


# 025 CONNECTOR

## TERMINAL

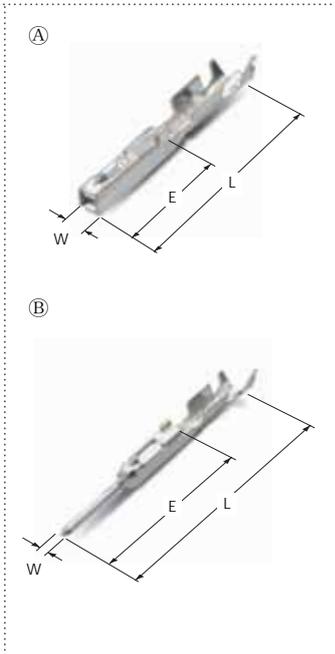

Part No.	Wire Range		Tab Thick.	Material		Dimension(mm)			Type
	AWG	mm <sup>2</sup>		Thick.	Finish	L	E	W	
ST731054-3	26-24	CHFUS 0.22, 0.13	0.64	0.2	Copper Alloy Pre-Tin	15.5	7.0	1.5	Ⓐ
ST731053-3	22-20	AVSS 0.3-0.5	0.64	0.2	Copper Alloy Pre-Tin	15.5	7.0	1.5	Ⓐ
ST741056-3	26-24	CHFUS 0.22, 0.13	0.64	0.2	Brass/ Pre-Tin	22.6	13.8	0.64	Ⓑ
ST741055-3	22-20	AVSS 0.3-0.5	0.64	0.2	Brass/ Pre-Tin	22.6	13.8	0.64	Ⓑ

► The blade width of male terminal for this connector is 0.025 inch.  
(DISTINCTIVE FEATURES)

1. 2.2mm terminal pitch.
2. Pre-set spacer.
3. Double locking mechanism to prevent terminal push-out
4. Unification of spacer assures complete terminal insertion



## HOUSING

Poles	Plug housing for female terminal	025 PCB CONNECTOR(VRT)	
24	<p>MG 654102</p>	<p>MG 644152</p>	<p>MG 644100</p>
28	<p>MG 654090</p>	<p>MG 644088</p>	
40	<p>MG 654116</p>	<p>MG 644114</p>	