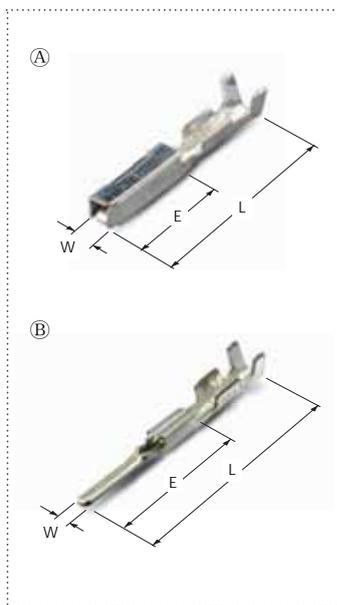


050 CONNECTOR

TERMINAL




Part No.	Wire Range		Tab Thick.	Material		Dimension(mm)			Type
	AWG	mm ²		Thick.	Finish	L	E	W	
ST731008-3	26-24	CHFUS 0.13-0.22 AVSS 0.22	0.64	0.2	Copper Alloy Pre-Tin	15.3	7.2	1.8	(A)
ST730751-3	22-20	CAVS(CAVUS) 0.3-0.5	0.64	0.2	Copper Alloy Pre-Tin	15.3	7.2	1.8	(A)
ST741009-3	24	AVSS 0.22	0.64	0.3	Brass Pre-Tin	21.75	13.2	1.25	(B)
ST740753-3	22-20	CAVS(CAVUS) 0.3-0.5	0.64	0.3	Brass Pre-Tin	21.75	13.2	1.25	(B)

► The blade width of male terminal for this connector is 0.050 inch and small size multi-pole connectors.

(Distinctive features)

1. Double terminal locking system eliminates terminal push-out.(Housing lance, Rear holder).
2. Connectors can not be mated if preset terminal spacer is not in full-lock position.












HOUSING

⇒ Suitable CLIP: 09011

Poles	Plug housing for female terminal	Receptacle housing for male terminal
2	<p>MG651586</p>	
7	<p>MG614010</p>	
10	<p>MG651580</p>	<p>MG641577</p>

050 CONNECTOR

HOUSING

Poles	Plug housing for female terminal	Receptacle housing for male terminal
15	<p>MG 651598</p> 	<p>MG 641595</p> 
18	<p>MG 651575</p> 	<p>MG 641572</p> 
21	<p>MG 611987-5</p>  <p>MG 631988-1</p> 	<p>MG 623343</p>  <p>MG 631988-1</p> 
23	<p>MG 651563</p> 	<p>MG 641560</p> 