


118 & 110 D/L CONNECTOR

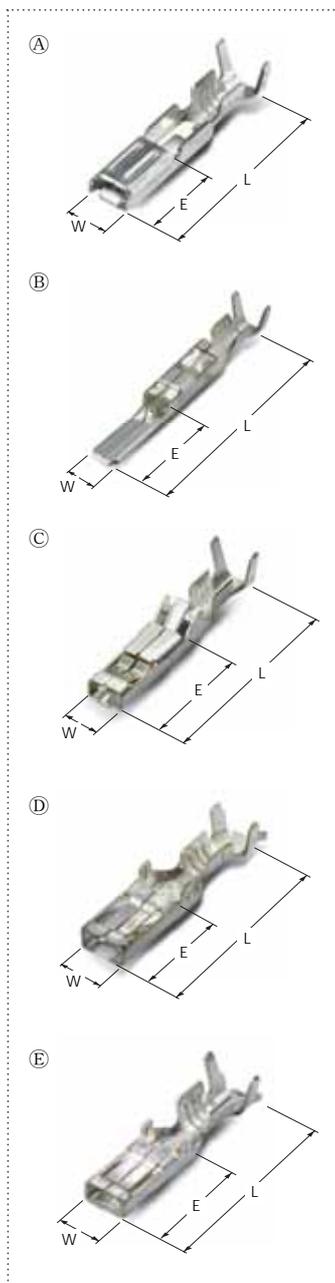

WITHOUT & WITH LANCE

Housing Locking Terminal

The connects accept wire size 0.3~2.0mm² with insulation up to 3.4mm

TERMINAL


Part No.	Wire Range		Tab Thick.	Thick.	Material Finish	Dimension(mm)			Type
	AWG	mm ²				L	E	W	
ST730258-3	22-18	AVSS 0.3-0.85	0.65	0.4	Brass Pre-Tin	20.3	7.0	4.1	A
ST730259-3	18-14	AVSS 1.04-2.63	0.65	0.4	Brass Pre-Tin	20.3	7.0	4.1	
ST740260-3	22-18	AVSS 0.3-0.85	0.65	0.3	Brass Pre-Tin	26.4	8.8	3.0	B
ST740261-3	18-14	AVSS 0.5-2.0	0.65	0.3	Brass Pre-Tin	26.4	8.8	3.0	
ST730403-3	22-18	AVSS 0.3-0.85	0.65	0.3	Phos. Bronze Pre-Tin	22.0	9.8	4.0	C
ST730404-3	16-14	AVSS 1.25-2.0	0.65	0.3	Phos. Bronze Pre-Tin	22.0	9.8	4.0	

110 D/L TERMINAL

ST730316-3	22-18	AVSS 0.3-0.85	0.65	0.3	Brass Pre-Tin	18.4	7.0	4.4	D
ST730364-3	16-14	AVSS 1.25-2.0	0.65	0.3	Brass Pre-Tin	18.4	7.0	4.4	
ST730705-3	22-18	AVSS 0.3-0.85	0.65	0.3	Brass Pre-Tin	18.4	7.0	4.4	E
ST730706-3	16-14	AVSS 1.25-2.0	0.65	0.3	Brass Pre-Tin	18.4	7.0	4.4	

110 D/L HOUSING

630123 (10P)

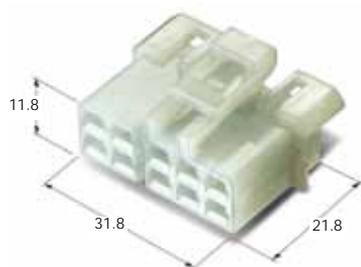

630124-3 (R/H)

